




Lashing Buckles 2T


Lashing buckles and hooks are essential to the tightening and preservation of your lashing webbing on packages that need to be stabilized during transport.

Easy to use, it is the most common lashing way when ratchet lashing is not adapted to packaging shape or hanging possibility.

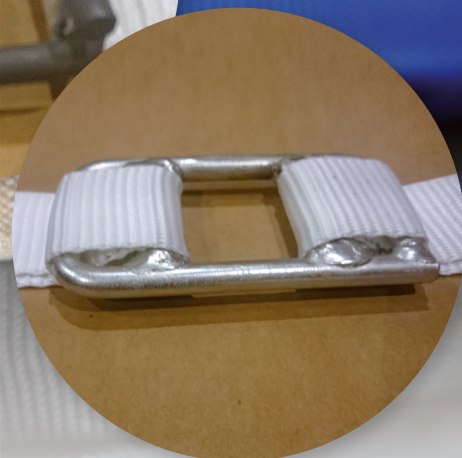

Buckle OWB 3030W

- Buckle OWB 3030 W / rectangular
- Tensile strenght : 3 000kg
- Webbing max width : 35mm
- Lenght : 104mm
- Box of 50 pcs

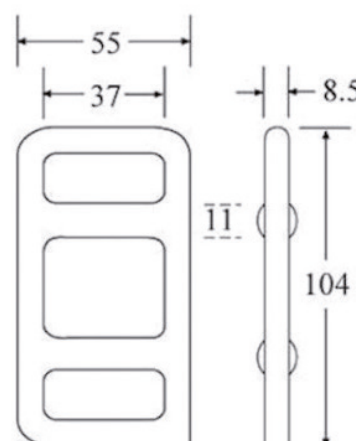

Phosphated buckle 2T

- Phosphated crossed buckle
- Type 1 inch 1/4
- Webbing max width : 32mm
- Thread 7.0 mm
- Suitable for strapping type glued / co-extruded / woven polyester or woven polypropylene
- Box of 250 pcs

information & contact

Mail : contact@bjservicesisolation.com
Tél : 00 (33) 235 411 002
43 rue des Drapiers
76600 Le Havre, FRANCE



www.isolationconteneurs.com